arXiv:1303.2870v1 [cs.IT] 12 Mar 2013

CoMP Meets Energy Harvesting: A New Communication and Energy Cooperation Paradigm

Jie Xu, Yinghao Guo, and Rui Zhang
ECE Department, National University of Singapore
Email: {elexjie, yinghao.guo, elezhang}@nus.edu.sg

***Abstract*—In this paper, we investigate joint communication and energy cooperation in cellular networks for the coordinated multi-point (CoMP) downlink transmission with base stations (BSs) powered by renewable energy. For the purpose of exposition, we consider a simplified CoMP model with two BSs cooperatively serving two mobile stations (MSs), where the BSs are connected by a power line to enable simultaneous data and energy sharing. We maximize the sum-rate for the two MSs with cooperative zero-forcing precoding at the two BSs subject to their individual power constraints but allowed to exchange energy via the power line that has a given loss ratio. We present an efficient algorithm to jointly optimize the precoder at the two BSs and the amount of energy transferred between them. We show that the proposed joint communication and energy cooperation solution can substantially improve the downlink throughput for energy harvesting CoMP systems, as compared to alternative designs without the communication and/or energy cooperation.**

I. INTRODUCTION

Green wireless cellular networks with improved energy efficiency have received significant attention recently. Among assorted green solutions [1], harvesting environmental energy (such as solar and wind) to power cellular base stations (BSs) is particularly appealing due to its environment-friendly and cost-effective advantages [2]. However, different from traditional energy supply from the grid, renewable energy is intermittent and unpredictable in practice, thus imposing new challenges for reliable communication. Recent studies on energy management in energy harvesting wireless communication can be found in e.g. [3]–[5] and references therein.

On the other hand, interference is a fundamental issue in wireless communication due to its broadcast nature, and has become more severe in next-generation spectrum and energy stringent cellular networks with smaller cell sizes and/or higher frequency reuse factors. In order to mitigate the inter-cell interference (ICI), BS cooperation or the so-called coordinated multi-point (CoMP) transmission has been extensively investigated in both academia and industry [6]–[9]. With symbol-level coordination enabled by baseband transmit message and channel state information (CSI) sharing among BSs, CoMP transforms the ICI to be a helpful factor for coherent communication and thereby greatly improves the cellular network throughput. Since the message and CSI sharing is always limited by the finite capacity of backhaul links among BSs, clustered CoMP transmission is a practically promising solution [8], [9].

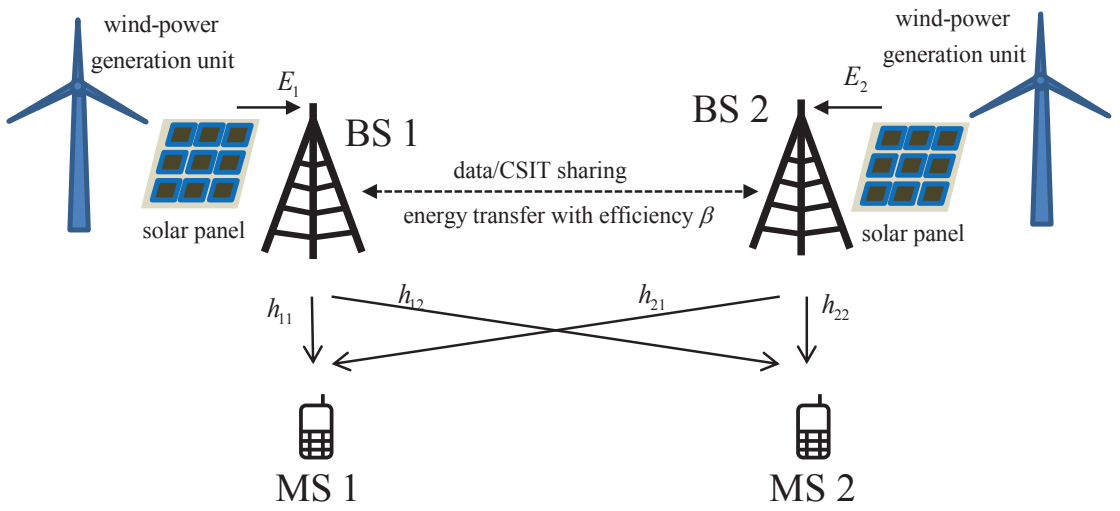

Fig. 1. A two-cell CoMP system with base stations (BSs) powered by renewable energy and connected by a power line for simultaneous data and energy sharing.

In this paper, we propose a unified study on energy harvesting and CoMP-based communication by considering the downlink CoMP transmission with BSs powered by energy harvesting. Due to the randomly harvested energy, each BS is subject to time-varying power available for transmission. If the transmit power is unevenly distributed among BSs (e.g., BSs are powered by different types of energy sources), then the cooperative transmission gain by CoMP will be limited by the BS with less transmit power. To overcome this issue, in this paper we propose a novel joint communication and energy cooperation approach for renewable powered CoMP systems. For the purpose of initial investigation, we consider a simplified two-cell CoMP system as shown in Fig. 1, where two BSs that are separately powered by energy harvesting jointly serve two mobile stations (MSs) via cooperative zero-forcing (ZF) downlink transmission [6], [7]. The general case with more than two BSs will be addressed in the journal version of this paper. It is assumed that the two BSs are connected by a power line, which enables simultaneous energy transfer as well as data sharing (via the power line communication [10]) for cooperative downlink transmission. To our best knowledge, the dual use of power lines for realizing joint communication and energy cooperation in cellular networks is a new proposal, which has not yet been investigated in the literature.

It is worth noting that there have been recent works on studying communication cooperation and/or energy cooperation in energy harvesting wireless communication [11]–[14]. In [11], the delay-optimal BS transmission control and user scheduling were investigated for energy harvesting CoMP systems. In [12], the throughput-optimal transmission policy was derived in a Gaussian relay channel with the source and relay both powered by energy harvesting. In [13], energy cooperation was introduced in a two-BS cellular system to minimize the energy drawn from conventional energy sources. However, only separated communication or energy cooperation was considered in [11]–[13]. Moreover, in [14], a two-hop

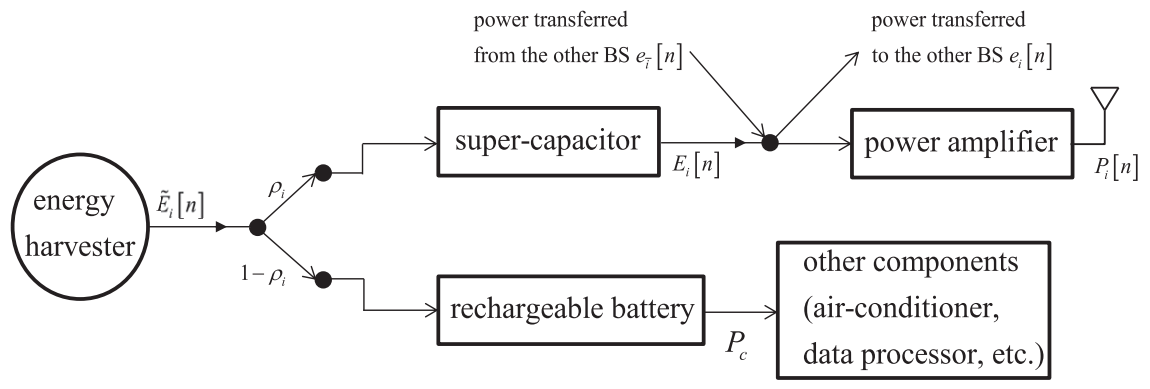

Fig. 2. Energy management schematics at BS.

communication system was investigated with unidirectional wireless energy transfer from the source to the relay.

In this paper, we jointly optimize the downlink cooperative precoding at the two BSs and the transferred energy between them to maximize the sum-rate to the two MSs. Interestingly, our new setup with BSs' energy sharing can be viewed as a generalization of the conventional CoMP transmit optimization under the BSs' sum-power or individual-power constraints. We propose an efficient algorithm to solve the proposed problem by applying convex optimization techniques, and compare the optimal sum-rate performance for energy harvesting CoMP systems against alternative designs without the communication and/or energy cooperation by simulations.

The remainder of this paper is organized as follows. Section II introduces the system model and formulates the joint communication and energy cooperation optimization problem. Section III presents an efficient algorithm for solving this problem. Section IV provides the simulation results to evaluate the performance of the proposed algorithm. Finally, Section V concludes the paper.

II. SYSTEM MODEL AND PROBLEM FORMULATION

We consider a two-cell downlink CoMP system as shown in Fig. 1, in which two single-antenna BSs, namely BS 1 and BS 2, cooperatively transmit independent messages to two single-antenna MSs. The MSs are assumed to each have a constant power supply, while the BSs are powered solely by renewable energy such as solar and/or wind. The BSs are connected by a power line, through which both energy and data can be exchanged. Accordingly, the two BSs are formed as a cluster. Within such a cluster, it is reasonable to assume that through a separately deployed power line communication [10], the data (including the transmit messages and CSI) sharing between the two BSs for enabling cooperative downlink transmission is perfect, similarly as assumed in [7]–[9]. Furthermore, we assume the energy management architecture at each BS as shown in Fig. 2, where the harvested energy at any given time is split into two portions to power different components of the BS. For a typical cellular BS, its power consumption is divided into a dynamic transmission related power that is mainly consumed by the power amplifier (PA) as well as a constant power that is consumed by other components such as air conditioning, data processing, etc. [15]. To supply the transmission power and enable BSs' energy sharing, a super-capacitor, which has ideally infinite charging/discharging cycles with zero energy loss, is applied for storing a fixed $\rho_i, 0 < \rho_i < 1$, portion of the harvested energy at BS $i, i \in \{1,2\}$, to be used by the PA and/or transferred to the other BS. To supply the constant power P_c consumed by other components at BS i, a rechargeable battery, which has a practical efficiency $\zeta, 0 < \zeta < 1$, is applied for storing the remaining $1-\rho_i$ portion of the harvested energy. Since P_c is a constant power, provided that the rechargeable battery has a feasible energy supply and load budget in the long term, i.e., $(1-\rho_i)\zeta\mathbb{E}[\tilde{E}] \geq P_c$ with $\mathbb{E}(\cdot)$ denoting the statistical expectation and $\tilde{E}$ denoting the randomly harvested energy, P_c can be guaranteed at all time. Thus, in the rest of this paper we will focus on the transmitted power and transferred energy scheduling at the two BSs. Note that at this stage of research, the optimal architecture to integrate renewable energy to wireless communication is unknown and there are various different models in the literature (see e.g. [16] and reference therein). The proposed architecture in Fig. 2 provides only one possible practical design.

We consider quasi-static time-slotted models for both renewable energy and wireless channel, where the energy harvesting rates and the channel coefficients remain constant in each slot and may change from one slot to another. The slot duration is normalized to unity for convenience, and thus energy and power will be used interchangeably in this paper.[1] In a slot $n > 0$, the harvested energy at BS i is denoted by $\tilde{E}_i[n] \geq 0$, $i = 1, 2$, of which an ρ_i portion is stored in the super-capacitor. Let the energy drawn by the super-capacitor be given by $E_i[n] = \rho_i \tilde{E}_i[n]$, which is then utilized as the transmit power and/or the transferred energy to the other BS. Denote the transferred energy from BS 1 to BS 2 and that from BS 2 to BS 1 as $e_1[n] \geq 0$ and $e_2[n] \geq 0$, respectively. Practically, there will be a certain loss in the energy transfer between BSs. For simplicity, we assume in this paper a linear loss proportional to $e_1[n]$ or $e_2[n]$, which is specified by a constant energy transfer efficiency β, with $0 \leq \beta \leq 1$. Note that $\beta = 0$ corresponds to the case of no energy transfer available between the two BSs, while $\beta = 1$ refers to the case of ideal energy transfer with zero loss. Then the available transmit power of two BSs in each slot, denoted by $P_i[n], i = 1, 2$, should satisfy the following constraints considering BSs' energy sharing:

$$P_i[n] \leq \eta \left(E_i[n] + \beta e_{\bar{i}}[n] - e_i[n] \right), i = 1, 2, \forall n, \qquad (1)$$

where $0 < \eta < 1$ is the PA efficiency and $\bar{i} = \{1, 2\} \setminus i$. Since η is a constant scaling factor, we assume $\eta = 1$ in the sequel for convenience. Note that the power constraints in (1) are independent over n; thus, we remove the slot index n in the rest of this paper.

We denote the complex channel coefficient from BS i to MS j as $h_{ij}, i, j = 1, 2$, and the channel vector from the two BSs to MS j as $\boldsymbol{h}_j = [h_{1j}\ h_{2j}], j = 1, 2$.[2] We consider cooperative transmission by the two BSs, and thus the CoMP downlink system can be viewed as a two-user multiple-input single-output broadcast channel (MISO-BC) with two transmit antennas. We assume cooperative ZF precoding [6] at the two BSs, although other precoding schemes can also be considered similarly. Let the information signal for MS j be denoted by s_j and its associated precoding vector at the two BSs by $\boldsymbol{t}_j \in \mathbb{C}^{2\times 1}, j = 1, 2$. Accordingly, the transmitted signal for MS j can be expressed as

---

[1] In practice, the duration of a communication block is usually on the order of millisecond, while the energy harvesting process evolves at a much slower speed, e.g., solar and wind power typically remains constant over windows of seconds. Without loss of generality, in this paper we choose the smaller communication block duration as one slot for convenience.

[2] Although we consider a narrowband channel model here, the results in this paper are readily extendible to the more general wideband channel case by applying OFDM-based transmissions.

$$\boldsymbol{x}_j = \boldsymbol{t}_j s_j, j = 1, 2. \tag{2}$$

Thus, the received signal at MS j is given by

$$\boldsymbol{y}_j = \boldsymbol{h}_j \boldsymbol{t}_j s_j + \boldsymbol{h}_j \boldsymbol{t}_{\bar{j}} s_{\bar{j}} + n_j, j = 1, 2, \tag{3}$$

where $\boldsymbol{h}_j \boldsymbol{t}_j s_j$ is the desired signal for MS j, $\boldsymbol{h}_j \boldsymbol{t}_{\bar{j}} s_{\bar{j}}$ is the inter-user interference, and n_j denotes the additive white Gaussian noise (AWGN) at MS j, which is assumed to be of zero mean and unit variance. It is also assumed that Gaussian signalling is employed at the transmitters, i.e., s_1 and s_2 are circularly symmetric complex Gaussian (CSCG) random variables with zero mean and unit variance. Then the covariance matrix of the transmitted signal for MS j can be expressed as $\boldsymbol{S}_j = \mathbb{E}(\boldsymbol{x}_j \boldsymbol{x}_j^H) = \boldsymbol{t}_j \boldsymbol{t}_j^H$, where the subscript H denotes the conjugate transpose. Accordingly, from (1) the transmit power constraint at BS i can be expressed by

$$\sum_{j=1}^{2} \mathtt{tr}(\boldsymbol{B}_i \boldsymbol{S}_j) = P_i \le E_i + \beta e_{\bar{i}} - e_i, i = 1, 2, \tag{4}$$

where $\boldsymbol{B}_1 = \begin{bmatrix} 1 & 0 \\ 0 & 0 \end{bmatrix}$ and $\boldsymbol{B}_2 = \begin{bmatrix} 0 & 0 \\ 0 & 1 \end{bmatrix}$.

If cooperative ZF precoding is employed, the inter-user interference will be removed. Thus, the precoding vectors should satisfy $\boldsymbol{h}_{\bar{j}} \boldsymbol{t}_j = 0$, or equivalently $\boldsymbol{h}_{\bar{j}} \boldsymbol{S}_j \boldsymbol{h}_{\bar{j}}^H = 0, j = 1, 2$ [7]. Under the above ZF constraints, we maximize the sum-rate to the two MSs by jointly optimizing the transmit covariances $\boldsymbol{S}_1$ and $\boldsymbol{S}_2$ as well as the transferred energy between the two BSs e_1 and e_2. Accordingly, the problem is formulated as

$$\text{(P1)}: \max_{\{\boldsymbol{S}_j, e_i\}} \sum_{j=1}^{2} \log_2(1 + \boldsymbol{h}_j \boldsymbol{S}_j \boldsymbol{h}_j^H) \tag{5}$$

$$\mathtt{s.t.} \quad \boldsymbol{h}_{\bar{j}} \boldsymbol{S}_j \boldsymbol{h}_{\bar{j}}^H = 0, \ j = 1, 2 \tag{6}$$

$$\sum_{j=1}^{2} \mathtt{tr}(\boldsymbol{B}_i \boldsymbol{S}_j) \le E_i + \beta e_{\bar{i}} - e_i, i = 1, 2 \tag{7}$$

$$\boldsymbol{S}_j \succeq 0, \quad 0 \le e_i \le E_i, \ i, j = 1, 2, \tag{8}$$

where for a square matrix $\boldsymbol{X}$, $\mathtt{tr}(\boldsymbol{X})$ denotes the trace of $\boldsymbol{X}$, and $\boldsymbol{X} \succeq 0$ denotes that $\boldsymbol{X}$ is positive semidefinite.

For problem (P1), we first consider the following two special cases with $\beta = 0$ and $\beta = 1$, respectively. Since $\beta = 0$ corresponds to the case of no energy transfer between the two BSs, it is easy to verify that the optimal solution of (P1) should satisfy $e_1 = e_2 = 0$. In this case, (P1) reduces to the conventional sum-rate maximization with per-BS power constraints [7] given by E_1 and E_2, i.e., (7) reduces to

$$\sum_{j=1}^{2} \mathtt{tr}(\boldsymbol{B}_i \boldsymbol{S}_j) \le E_i, i = 1, 2. \tag{9}$$

On the other hand, since $\beta = 1$ corresponds to the case where the energy of the two BSs can be shared ideally without any loss, it can be easily verified that BSs' individual power constraints in (7) can be combined as one single sum-power constraint: $\sum_{j=1}^{2} \mathtt{tr}(\boldsymbol{S}_j) \le E_1 + E_2$. In this case, problem (P1) reduces to the conventional sum-rate maximization under the BSs' sum-power constraint [7].

In Fig. 3, we show the feasible region of the transmit power for the two BSs P_1 and P_2 in the case of $0 < \beta < 1$ (shown as the shaded area) as compared to the other two extreme cases of $\beta = 0$ and $\beta = 1$. It is observed that the boundary of the feasible region when $\beta > 0$ is always attained either by $e_1 > 0$, $e_2 = 0$ or $e_1 = 0$, $e_2 > 0$, i.e., only unidirectional energy transfer between BS 1 and BS 2 is needed to achieve the optimal solution of (P1). It is also observed that this region in the case of $0 < \beta < 1$ is larger than that without energy sharing, i.e., $\beta = 0$, and at the same time smaller than that with ideal energy sharing, i.e., $\beta = 1$. As a result, the optimal value of (P1) in the case of $0 < \beta < 1$ should lie between those of the conventional two extreme cases with the per-BS power constraints and the BSs' sum-power constraint, respectively, as will be shown next.

III. OPTIMAL SOLUTION

In this section, we solve problem (P1) by convex optimization. First, we remove the ZF constraints in (P1). Denote $\boldsymbol{v}_j = \frac{\boldsymbol{h}_{\bar{j}}^H}{\|\boldsymbol{h}_{\bar{j}}\|}$ and $\boldsymbol{P}_j = \boldsymbol{I} - \boldsymbol{v}_j \boldsymbol{v}_j^H, j = 1, 2$. Then, without loss of generality we can express $\boldsymbol{P}_j = \tilde{\boldsymbol{v}}_j \tilde{\boldsymbol{v}}_j^H$, and it follows that $\boldsymbol{v}_j^H \tilde{\boldsymbol{v}}_j = 0$ and $\tilde{\boldsymbol{v}}_j^H \tilde{\boldsymbol{v}}_j = 1$. Then we have the following proposition.

Proposition 3.1: The optimal transmit covariance matrices for problem (P1) can be expressed as

$$\boldsymbol{S}_j = p_j \tilde{\boldsymbol{v}}_j \tilde{\boldsymbol{v}}_j^H, \tag{10}$$

where $p_j \ge 0, j = 1, 2$.

Proof: The proof is similar to that of [7, Lemma 3.1], and thus is omitted for brevity. ■

Using Proposition 3.1 and by defining $a_j = |\boldsymbol{h}_j \tilde{\boldsymbol{v}}_j|^2$ and $b_{ij} = \tilde{\boldsymbol{v}}_j^H \boldsymbol{B}_i \tilde{\boldsymbol{v}}_j, i, j = 1, 2$ with $|\cdot|$ denoting the magnitude of a complex number, (P1) is equivalently reformulated as[3]

$$\text{(P2)}: \max_{\{p_j, e_i\}} \sum_{j=1}^{2} \log_2(1 + p_j a_j) \tag{11}$$

$$\mathtt{s.t.} \quad \sum_{j=1}^{2} p_j b_{ij} \le E_i + \beta e_{\bar{i}} - e_i, i = 1, 2 \tag{12}$$

$$p_j \ge 0, \quad 0 \le e_i \le E_i, i, j = 1, 2. \tag{13}$$

---

[3] In this paper, we assume that the channel vectors $\boldsymbol{h}_1$ and $\boldsymbol{h}_2$ are independently drawn from a continuous distribution, and thus without loss of generality we assume $a_j > 0, b_{ij} > 0, \forall i, j$.

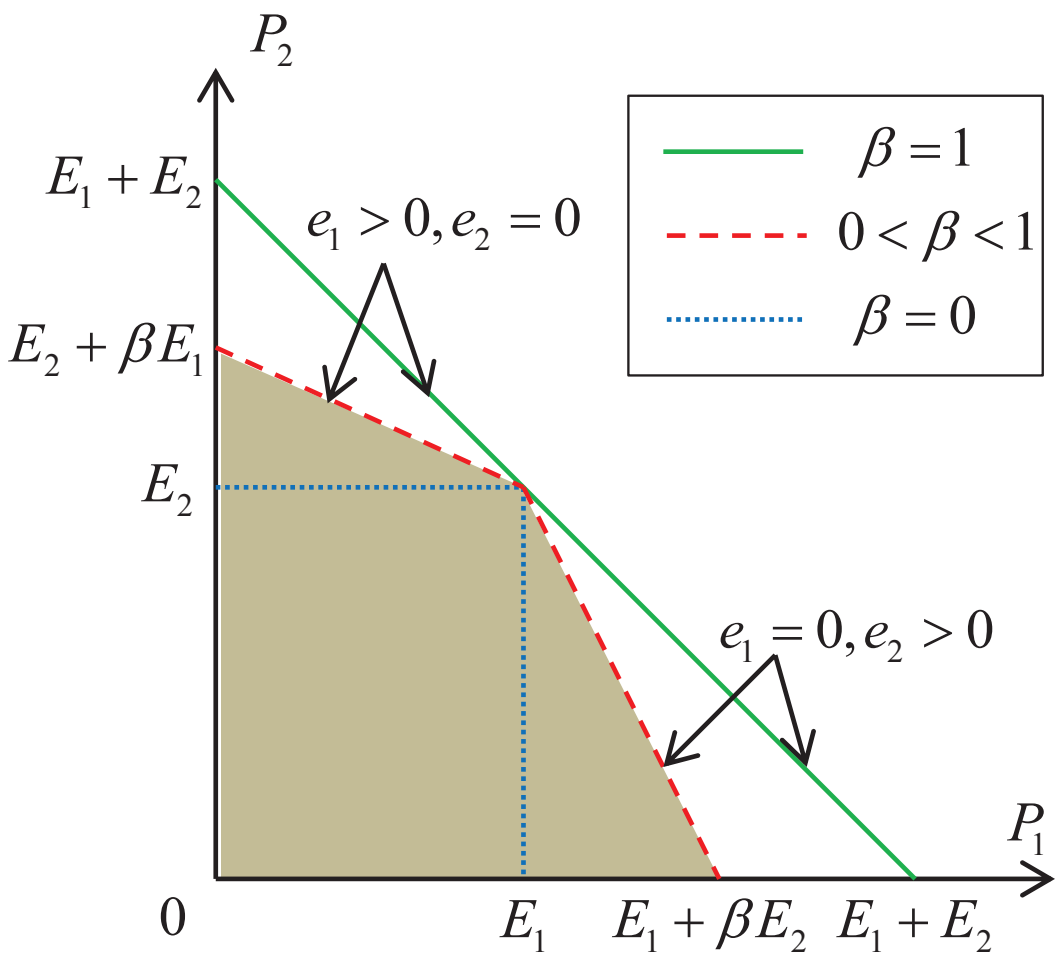

Fig. 3. Feasible region of BS transmit power under energy cooperation.

It can be verified that problem (P2) is convex, since the objective function is concave and the constraints are all affine. Thus, Lagrange duality method can be applied to solve this problem globally optimally [17]. Let $\mu_i \geq 0, i = 1, 2$ be the dual variables associated with the two constraints of (P2) given in (12). Then the Lagrangian of (P2) is given by

$$\mathcal{L}\left(\{\mu_i\}, \{p_j\}, \{e_i\}\right)$$
$$= \sum_{j=1}^{2} \left(\log_2(1 + p_j a_j) - p_j \sum_{i=1}^{2} \mu_i b_{ij} \right) + \sum_{i=1}^{2} e_i(\mu_{\bar{i}}\beta - \mu_i).$$

Accordingly, the Lagrange dual function can be obtained as

$$f(\mu_1, \mu_2) = \max_{\{p_j, e_i\}} \mathcal{L}\left(\{\mu_i\}, \{p_j\}, \{e_i\}\right)$$
$$\texttt{s.t.}\ p_j \geq 0, \quad 0 \leq e_i \leq E_i, i, j = 1, 2. \tag{14}$$

Then, the dual problem is expressed as

$$(\text{P2D}): \min_{\mu_i \geq 0, \forall i} \ f(\mu_1, \mu_2).$$

Since (P2) is convex and satisfies the Salter's condition, strong duality holds between (P2) and its dual problem (P2D) [17]. Thus, we can solve (P2) by solving its dual problem (P2D) equivalently. To solve (P2D), in the following we first solve problem (14) to obtain $f(\mu_1, \mu_2)$ with given $\mu_1 \geq 0$ and $\mu_2 \geq 0$, and then search over μ_1 and μ_2 in $\mathbb{R}_2^+$ to minimize $f(\mu_1, \mu_2)$.

We first give the following lemma.

Lemma 3.1: In order for $f(\mu_1, \mu_2)$ to be bounded from above, it follows that at least one of $\mu_1 > 0$ and $\mu_2 > 0$ must hold.

Proof: Suppose that $\mu_1 = \mu_2 = 0$. In this case, it is easy to verify that the objective value of (14) goes to infinity as $p_1 \to \infty$ and/or $p_2 \to \infty$, i.e., $f(\mu_1, \mu_2)$ is unbounded from above. Therefore, μ_1 and μ_2 cannot be zero at the same time for $f(\mu_1, \mu_2)$ to be bounded from above. This proposition is thus proved. ■

According to Lemma 3.1, we only need to solve problem (14) with given μ_1 and μ_2 satisfying $\mu_1 > 0$ and/or $\mu_2 > 0$. In this case, problem (14) can be decomposed into the following four subproblems:

TABLE I
ALGORITHM FOR SOLVING PROBLEM (P1)

```
a) Initialize $\mu_1 > 0$ and $\mu_2 > 0$.
b) Repeat:
    1) Obtain $\{p_i^{(\mu_1,\mu_2)}\}$ and $\{e_i^{(\mu_1,\mu_2)}\}$ using (17) and (18), respectively, with given $\mu_1$ and $\mu_2$;
    2) Compute the subgradients of $f(\mu_1, \mu_2)$ as $E_1 - \sum_{j=1}^2 p_j^{(\mu_1,\mu_2)} b_{1j} + \beta e_2^{(\mu_1,\mu_2)} - e_1^{(\mu_1,\mu_2)}$ and $E_2 - \sum_{j=1}^2 p_j^{(\mu_1,\mu_2)} b_{2j} + \beta e_1^{(\mu_1,\mu_2)} - e_2^{(\mu_1,\mu_2)}$, then update $\mu_1$ and $\mu_2$ accordingly based on the ellipsoid method [18].
c) Until $\mu_1$ and $\mu_2$ both converge within a prescribed accuracy.
d) Set $\boldsymbol{S}_j^* = p_j^* \tilde{\boldsymbol{v}}_j \tilde{\boldsymbol{v}}_j^H, j = 1, 2$ and determine $e_1^*$ and $e_2^*$ from (21)-(23).
```

$$\max_{p_j \geq 0} \ \log_2(1 + p_j a_j) - p_j \sum_{i=1}^{2} \mu_i b_{ij}, j = 1, 2 \tag{15}$$

$$\max_{0 \leq e_i \leq E_i} \ e_i(\mu_{\bar{i}}\beta - \mu_i), i = 1, 2. \tag{16}$$

For the two subproblems in (15), note that $\sum_{i=1}^2 \mu_i b_{ij} > 0$ always holds due to Lemma 3.1; then it can be easily verified that the optimal solutions can be obtained as

$$p_j^{(\mu_1,\mu_2)} = \left(\frac{1}{\ln 2 \sum_{i=1}^2 \mu_i b_{ij}} - \frac{1}{a_j} \right)^+, j = 1, 2, \tag{17}$$

where $(x)^+ = \texttt{max}(x, 0)$. Next, consider the other two subproblems in (16), for which it can be easily shown that the optimal solutions are[4]

$$e_i^{(\mu_1,\mu_2)} = \begin{cases} E_i, & \mu_{\bar{i}}\beta - \mu_i > 0 \\ 0, & \mu_{\bar{i}}\beta - \mu_i \leq 0 \end{cases} \quad i = 1, 2. \tag{18}$$

Combining the results in (17) and (18), we obtain $f(\mu_1, \mu_2)$ with given $\mu_1 \geq 0$ and $\mu_2 \geq 0$ (but not both equal to zero). Then, we solve problem (P2D) by finding the optimal μ_1 and μ_2 to minimize $f(\mu_1, \mu_2)$. Since (P2D) is convex, a subgradient based method such as the ellipsoid method [18] can be applied, for which it can shown that the subgradients of $f(\mu_1, \mu_2)$ for given μ_1 and μ_2 are $E_1 - \sum_{j=1}^2 p_j^{(\mu_1,\mu_2)} b_{1j} + \beta e_2^{(\mu_1,\mu_2)} - e_1^{(\mu_1,\mu_2)}$ and $E_2 - \sum_{j=1}^2 p_j^{(\mu_1,\mu_2)} b_{2j} + \beta e_1^{(\mu_1,\mu_2)} - e_2^{(\mu_1,\mu_2)}$, respectively. Therefore, the optimal solution of (P2D) can be obtained as μ_1^* and μ_2^*. Then, the corresponding p_1 and p_2 in (17) become the optimal solution for (P2), denoted by p_1^* and p_2^*, respectively; accordingly, the optimal transmit covariance solutions $\boldsymbol{S}_1^*$ and $\boldsymbol{S}_2^*$ for (P1) can be obtained from Proposition 3.1 as

$$\boldsymbol{S}_j^* = p_j^* \tilde{\boldsymbol{v}}_j \tilde{\boldsymbol{v}}_j^H, j = 1, 2. \tag{19}$$

It should be pointed out that the optimal solution of e_1 and e_2 for problem (P2) in general cannot be directly obtained from (18) with given μ_1^* and μ_2^*, since the solution of (18) is not unique if $\mu_{\bar{i}}^*\beta - \mu_i^* = 0$. In order to obtain the optimal solution of e_1 and e_2, denoted by e_1^* and e_2^*, respectively, it is observed that the following conditions must hold due to the complementary slackness [17]:

---

[4] Note that if $\mu_{\bar{i}}\beta - \mu_i = 0$, then the optimal solution of e_i is generally not unique and can take any value in the interval $[0, E_i]$ in problem (16). For convenience, we let $e_i^{(\mu_1,\mu_2)} = 0$ in this case.

$$\mu_i^* \left(\sum_{j=1}^{2} p_j^* b_{ij} - E_i - \beta e_{\bar{i}}^* + e_i^* \right) = 0, i = 1, 2. \tag{20}$$

Since from Lemma 3.1, it is known that at least one of μ_1^* and μ_2^* should be strictly positive, we only need to consider the following three cases for determining e_1^* and e_2^*:

- $\mu_1^* > 0, \mu_2^* > 0$: In this case, from (20) we have

$$\sum_{j=1}^{2} p_j^* b_{ij} - E_i - \beta e_{\bar{i}}^* + e_i^* = 0, i = 1, 2, \tag{21}$$

  by solving which we can obtain e_1^* and e_2^*.
- $\mu_1^* > 0, \mu_2^* = 0$: In this case, we have $\sum_{j=1}^{2} p_j^* b_{1j} - E_1 - \beta e_2^* + e_1^* = 0$ from (20) with $i = 1$. Since we know that only one of e_1^* and e_2^* can be strictly positive (c.f. our discussion for Fig. 3), it follows that

$$e_1^* = E_1 - \sum_{j=1}^{2} p_j^* b_{1j}, \ e_2^* = 0. \tag{22}$$

- $\mu_1^* = 0, \mu_2^* > 0$: Similarly to the second case, we have

$$e_1^* = 0, \ e_2^* = E_2 - \sum_{j=1}^{2} p_j^* b_{2j}. \tag{23}$$

In summary, one algorithm to solve (P1) is given in Table I.

Remark 3.1: It is worth pointing out that if $0 < \beta \leq 1$, then it can be shown that the optimal solution of (P1) is always obtained with the power constraints in (7) being met with strict equality. However, this result does not hold in general with $\beta = 0$, i.e., the transmit power constraints in (9) may not be both tight with the optimal solution of (P1) in this case [7]. As a result, in the case of $\beta = 0$, i.e., when there is no energy cooperation between the two BSs, the harvested energy at one of the two BSs may be wasted without any use. In contrast, if there is an energy cooperation in the case of $0 < \beta \leq 1$, then it follows that all the harvested energy at both BSs will be used to maximize the sum-rate (albeit that some energy is lost in the energy transfer between the two BSs if $\beta < 1$), which results in an energy cooperation gain as will be shown next by numerical examples.

IV. NUMERICAL EXAMPLES

In this section, we provide simulation results to evaluate the performance of our proposed joint communication and energy cooperation algorithm. We assume that the channels are independent and identically distributed (i.i.d.) Rayleigh fading, i.e., h_{ij}'s are CSCG random variables with zero mean and variances α_{ij}^2, $i, j = 1, 2$. We further assume $\alpha_{11}^2 = \alpha_{22}^2 = 1$ for the direct BS-MS channels, and $\alpha_{12}^2 \leq 1, \alpha_{21}^2 \leq 1$ for the cross BS-MS channels.

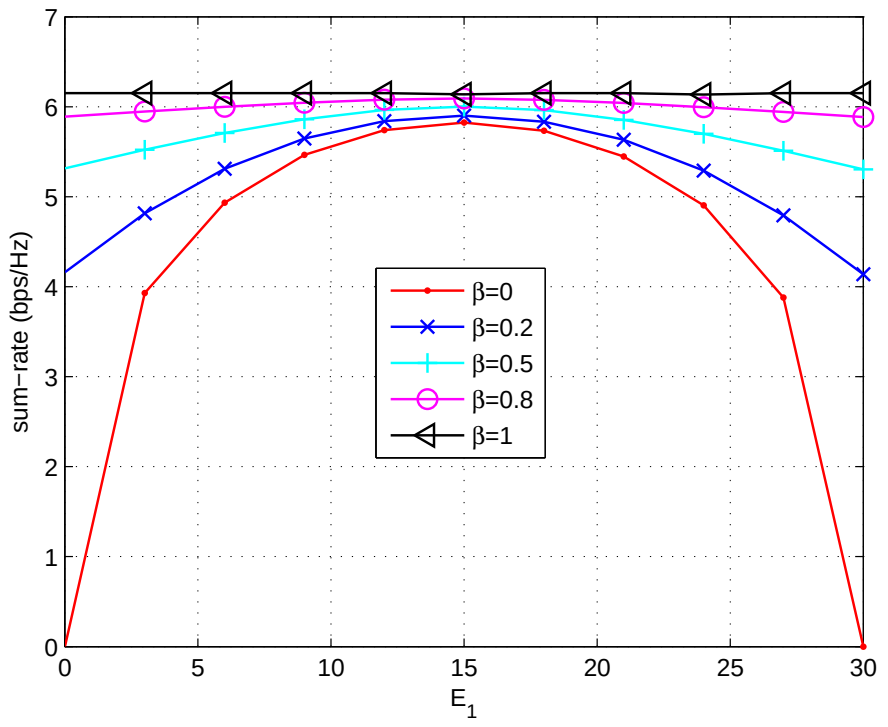

Fig. 4. Sum-rate performance with $E_1 + E_2 = 30$.

In Fig. 4, we assume that the energy arrival rates E_1 and E_2 at the two BSs are constant over time subject to $E_1 + E_2 = 30$,[5] and plot the achievable sum-rate with different values of β and E_1. We set $\alpha_{12} = \alpha_{21} = 0.5$, and average the achievable sum-rate over 1000 random channel realizations. It is observed that as β increases, the sum-rate increases for any given $0 \leq E_1 \leq 30$, which is due to the fact that larger value of β corresponds to smaller energy transfer loss. It is also observed that the sum-rate is zero when $\beta = 0$ and $E_1 = 0$ or 30 (or equivalently $E_2 = 30$ or 0). This is because that in this case, there is one BS with zero transmit power, and without energy sharing between the two BSs their cooperative ZF precoding cannot be implemented. Furthermore, with any given $0 \leq \beta < 1$, it is observed that the maximum sum-rate is always achieved when the energy arrival rates at the two BSs are equal, i.e., $E_1 = E_2 = 15$. The reason is given as follows. Under the given symmetric channel setup, when $E_1 = E_2 = 15$, the amount of transferred energy between the two BSs is minimal, and so is the energy lost in energy sharing; as a result, the total available energy for wireless transmission is maximized, which thus yields the maximum sum-rate.

In Figs. 5 and 6, we show the sum-rate performance of the proposed scheme with joint communication and energy cooperation with $\beta > 0$ as compared to three benchmark schemes without communication and/or energy cooperation given as follows:

- **No energy cooperation, communication cooperation only**: This scheme corresponds to $\beta = 0$ for (P1).
- **No communication cooperation, energy cooperation only**: In this scheme, each BS transmits to one MS over half of the total bandwidth, for which the achievable sum-rate with given P_1 and P_2 is

$$0.5 \times \left(\log_2(1 + 2|h_{11}|^2 P_1) + \log_2(1 + 2|h_{22}|^2 P_2) \right) \tag{24}$$

  By maximizing (24) subject to the energy constraints given in (4), the maximum sum-rate can be obtained for this case.
- **No cooperation**: When both communication and energy cooperation are not available, this scheme achieves the sum-rate given in (24) with $P_1 = E_1$ and $P_2 = E_2$.

---

[5] The energy unit is normalized here such that one unit energy is equivalent to the transmit energy required to have an average signal-to-noise ratio (SNR) at each MS equal to one or 0dB.

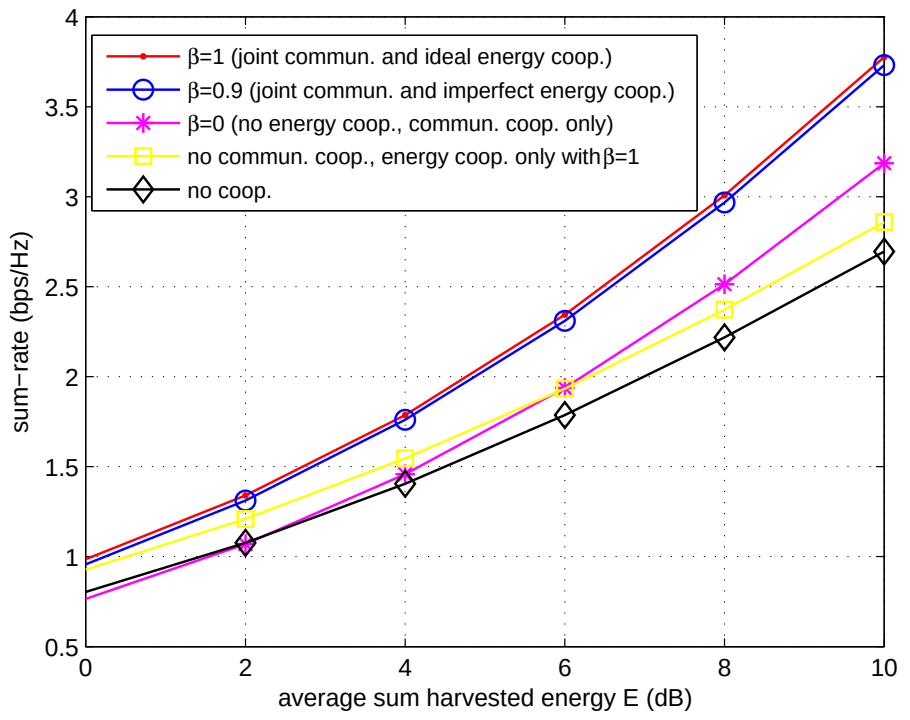

Fig. 5. Sum-rate comparison with versus without communication and/or energy cooperation in the low-SNR regime.

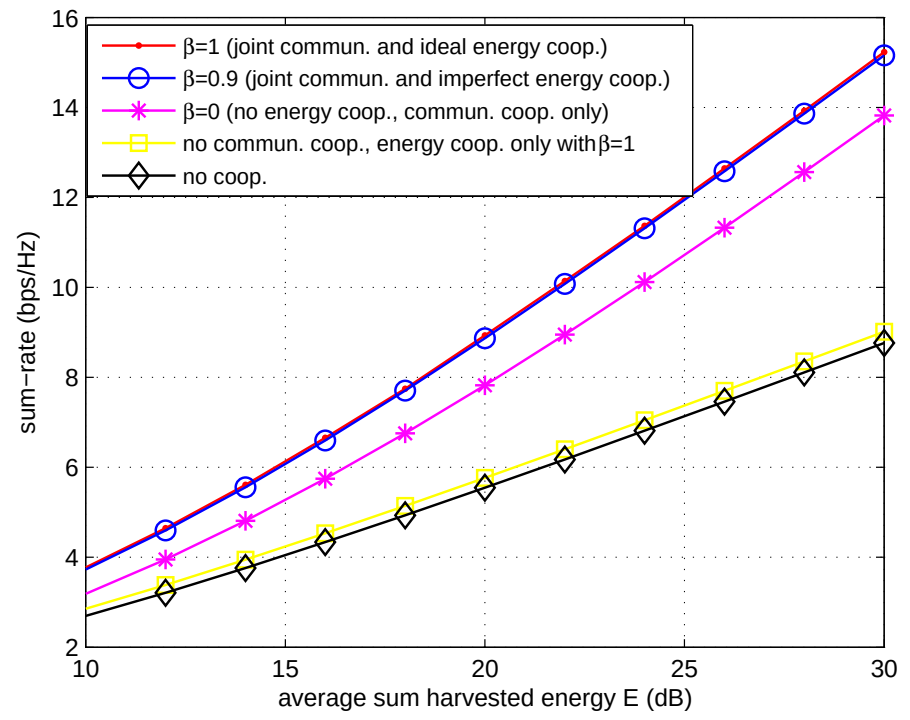

Fig. 6. Sum-rate comparison with versus without communication and/or energy cooperation in the high-SNR regime.

We assume α_{12} and α_{21} are independent and uniformly distributed in $[0, 1]$, and the energy arrival rates E_1 and E_2 are independent and uniformly distributed in $[0, E]$, with E denoting the average sum energy harvested by both BSs. Note that the independent energy distribution may correspond to the case where the two BSs are powered by different energy sources, e.g., one by solar and the other by wind. From Figs. 5 and 6, it is observed that the joint communication and (ideal) energy cooperation with $\beta = 1$ always achieves the highest sum-rate, while the joint communication and (imperfect) energy cooperation with $\beta = 0.9$ achieves the sum-rate very close to that of $\beta = 1$, and also outperforms the three benchmark schemes. This shows the gain of joint communication and energy cooperation, even with small energy transfer loss. It is also observed that with $E < 6$dB, the scheme of "energy cooperation only" outperforms that of "communication cooperation only"; however, the opposite is true when $E > 6$dB. This shows that the gain of energy cooperation is more dominant over that of communication cooperation in the low-SNR regime, but vice versa in the high-SNR regime.

V. CONCLUSION

In this paper, we propose a new joint communication and energy cooperation approach for emerging energy harvesting powered CoMP systems. With the newly proposed energy sharing between cooperative BSs, we formulate a sum-rate maximization problem that takes into account the non-negligible energy loss in energy sharing. By applying convex optimization techniques, we propose an efficient algorithm to obtain the optimal cooperative precoding and energy sharing solutions, and show by numerical results the potential sum-rate gains via jointly exploiting communication and energy cooperation in cellular networks. It is revealed that energy cooperation is most beneficial when the harvested energy amounts among BSs are not even (e.g., BSs are powered by different energy sources), and/or when there is no communication cooperation among BSs available.

REFERENCES

[1] Z. Hasan, H. Boostanimehr, and V. Bhargava, "Green cellular networks: a survey, some research issues and challenges," *IEEE Commun. Surveys & Tutorials*, vol. 13, no. 4, pp. 524-540, 2011.
[2] Huawei, "Renewable energy", available online at http://www.greenhuawei.com/green/greenenergy.html.
[3] O. Ozel, K. Tutuncuoglu, J. Yang, S. Ulukus, and A. Yener, "Transmission with energy harvesting nodes in fading wireless channels: Optimal policies," *IEEE J. Sel. Areas Commun.*, vol. 29, no. 8, pp. 1732-1743, Sep. 2011.
[4] C. K. Ho and R. Zhang, "Optimal energy allocation for wireless communications with energy harvesting constraints," *IEEE Trans. Signal Process.*, vol. 60, no. 9, pp. 4808-4818, Sep. 2012.
[5] J. Xu and R. Zhang, "Throughput optimal policies for energy harvesting wireless transmitters with non-ideal circuit power," to appear in *IEEE J. Sel. Areas Commun.*. (available on-line at arXiv:1204.3818)
[6] D. Gesbert, S. Hanly, H. Huang, S. Shamai, O. Simeone, and W. Yu, "Multi-cell MIMO cooperative networks: A new look at interference," *IEEE J. Sel. Areas Commun.*, vol. 28, no. 9, pp. 1380-1408, Dec. 2010.
[7] R. Zhang, "Cooperative multi-cell block diagonalization with per-base-station power constraints," *IEEE J. Sel. Areas Commun.*, vol. 28, no. 9, pp. 1435-1445, Sep. 2010.
[8] J. Zhang, R. Chen, J. Andrews, A. Ghosh, and R. W. Heath, "Networked MIMO with clustered linear precoding," *IEEE Trans. Wireless Commun.*, vol. 8, no. 4, Apr. 2009.
[9] C. T. K. Ng and H. Huang, "Linear precoding in cooperative MIMO cellular networks with limited coordination clusters," *IEEE J. Sel. Areas Commun.*, vol. 28, no. 9, pp. 1446-1454, Dec. 2010.
[10] M. Goetz, M. Rapp, and K. Dostert, "Power line channel characteristics and their effect on communication system design," *IEEE Commun. Mag.*, vol. 42, no. 4, pp. 78-86, Apr. 2004.
[11] Y. Cui, V. K. N. Lau, and Y. Wu, "Delay-aware BS discontinuous transmission control and user scheduling for energy harvesting downlink coordinated MIMO systems," *IEEE Trans. Signal Process.*, vol. 60, no. 7, pp. 3786-3795, Jul. 2012.
[12] C. Huang, R. Zhang, and S. Cui, "Throughput maximization for the Gaussian relay channel with energy harvesting constraints," to appear in *IEEE J. Sel. Areas Commun.*. (available online at arXiv:1109.0724)
[13] Y. K. Chia, S. Sun, and R. Zhang, "Energy cooperation in cellular networks with renewable powered base stations," to appear in *IEEE Wireless Communications and Networking Conference (WCNC)*, 2013. (available online at arXiv:1301.4786)
[14] B. Gurakan, O. Ozel, J. Yang, and S. Ulukus, "Energy cooperation in energy harvesting wireless communications," *IEEE International Symposium on Information Theory (ISIT)*, July 2012.
[15] O. Arnold, F. Richter, G. Fettweis, and O. Blume, "Power consumption modeling of different base station types in heterogeneous cellular networks, in *Proceedings of the ICT MobileSummit (ICT Summit10)*, Jun. 2010.
[16] S. Luo, R. Zhang, and T. J. Lim, "Optimal save-then-transmit protocol for energy harvesting wireless transmitters," to appear in *IEEE Trans. Wireless Commun.*. (available on-line at arXiv:1204.1240)
[17] S. Boyd and L. Vandenberghe, *Convex Optimization*, Cambridge University Press, 2004.
[18] S. Boyd, "Convex optimization II," Stanford University. (available online at http://www.stanford.edu/class/ee364b/lectures.html)